


The seat adapter should be mounted with three bolts



The two adapters should be facing in the same direction when mounted to the seat – opening facing away from the center of the

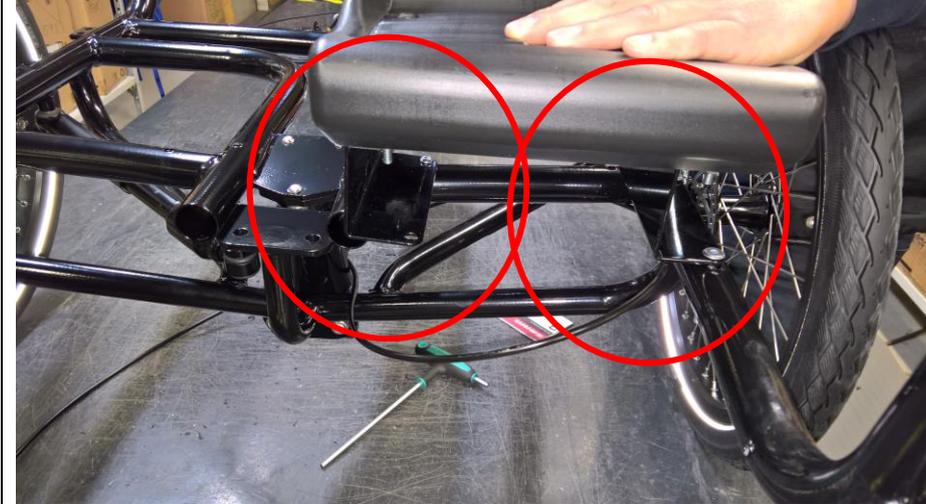

The three bolts are going through the front frame and well supported.



Picture of the third seat mounted correctly